


Sensor devices



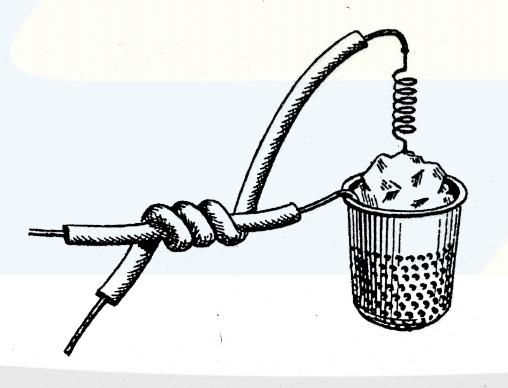


Outline

- 9 Biosensors
 - Introduction
 - Immobilization of biological elements
 - Mass transport in Biosensor
 - Transduction Principles
 - Some examples
- •10 Integrated Sensors



- Biosensors are a special class of chemical sensors that take advantage of the high selectivity and sensitivity of biologically active materials
- Bio-affinity, strong bindning, transducer must detect receptor-analyte pair
- Bio-metabolic, analyte and co-reactant form a product molecules, which the transducer must detect, resulting in a change in concentrations of the products or co-reactant

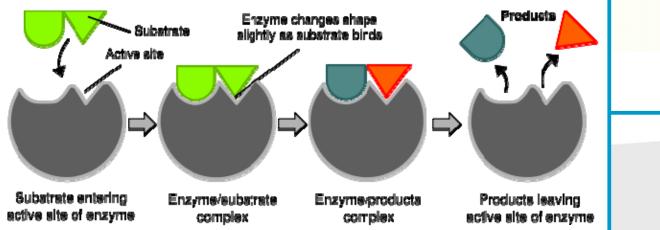



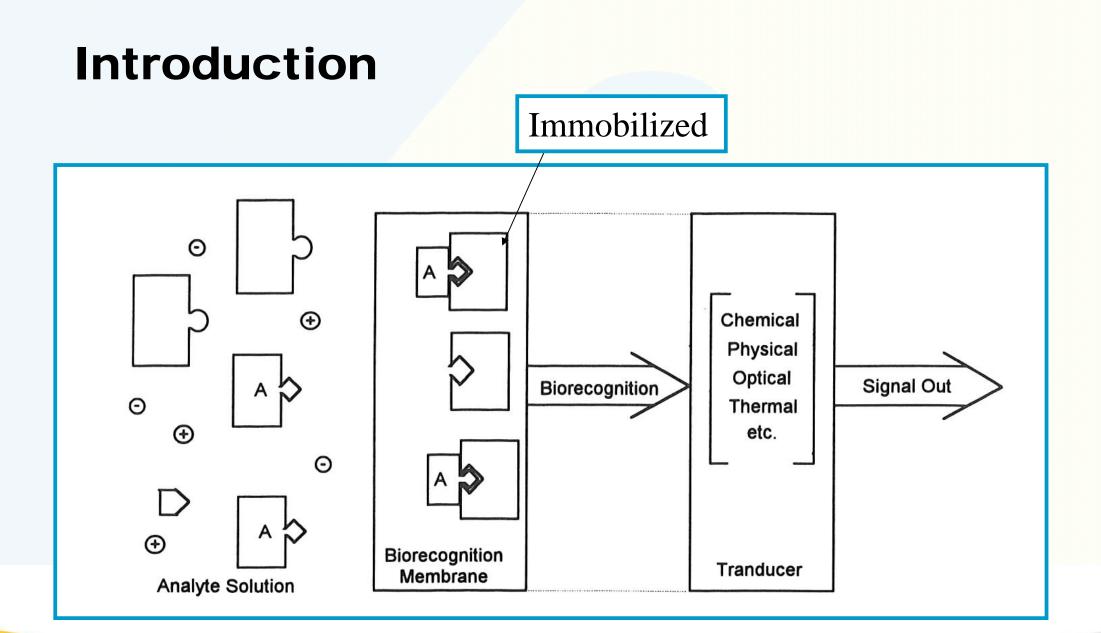




TABLE 1 Classes of Recognizable Biological Chemicals and Some Examples		
Analyte	Examples	
Metabolic chemicals Enzyme substrates	Oxygen, methane, ethanol, other nutrients Glucose, penicillin, urea	
Ligands Antigens and antibodies Nucleic acids	Neurotransmitters, hormones, pheromones, toxins Human Ig, anti-human Ig DNA, RNA	



Biological Elements	Transducer Type	Transcucer Example
Organisms	Electrochemical:	
Tissues	a. Potentiometric	Ion selective field-effect transistors
Cells		and micro-electrodes
Organelles	b. Amperometric	Micro-electrodes
Membranes	c. Impedometric	Micro-electrodes
Enzymes	Optical	Fiber optodes and luminescence
Receptors	Calorimetry (thermal)	Thermistors and thermocouples
Antibodies	Acoustic (mass)	Surface acoustic wave delay-lines and
Nucleic Acids		bulk acoustic wave microbalances

TABLE 2 Biosensor Components

A biosensor consists of a biological sensing element (column one) plus a transducer (column two). Examples of specific transducers are given in column three next to the transduction principle.



- Recognition elements
 - Whole organism down to molecules
 - For organic material like cells, organelles and tissues, the problem is to keep them alive
 - Enzyme are proteins, which catalyst the reaction i.e. lower the activation energy
 - Enzymes catalytic activity are strongly depended of the environment condition. For example the pH-level



- Biomimetic structures
 - Artificial structures that are built up to mimic the processes that occur in the cell membranes
 - Receptor can recognise molecules end then change the permeability in the membrane.



Immobilization of biological elements

- The immobilization process should:
 - Confine the biologically active material on the transducer
 - Allow contact to the analyte solution
 - Reaction products to diffuse out from the immobilization layer
 - Not denature the biologically active material
 - Mechanical damage
 - Heat or freezing
 - Chemical toxin
 - etc



Immobilization of biological elements

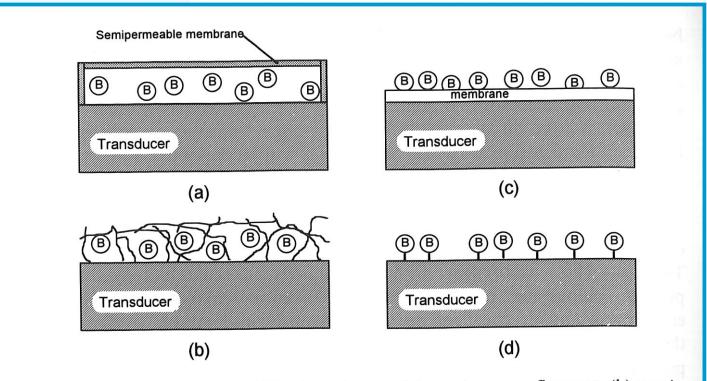


Fig. 5 The four different immobilization schemes: (a) membrane confinement, (b) matrix entrapment, (c) physical adsorption and (d) covalent bonding. "B" stands for the biologically active material, which can include antibodies, enzymes, receptors, organelles, cells, tissues, and organisms.



Mass transport in Biosensor

- Analyte transport into the membrane
- Transport of reaction products to the transducer
- Transport of products out of membrane
- Similar theory as for diffusion in semiconductor
- Concentration profile for a species can be described by:

$$C(x, t) = C_{\text{bulk}} \operatorname{erf}\left(\frac{x}{2\sqrt{Dt}}\right).$$



Transduction Principles

- Electrochemical
 - Potentiometric
 - Measuring a potential (voltage) across an electrochemical cell "battery!" containing biological sensing element
 - Amperiometric
 - Measuring a current from an electrochemical cell, the current oxidise or reduce the analyte
 - Impediometric
 - Measuring impedance frequency response



Transduction Principles


- Optical
 - Optical absorption or emission of a molecule or molecules
 - Absorption in infrared to ultraviolet
 - Emission, Fluorescence by x-ray spectroscopy
 - Direct method
 - » Optical absorption when analyte binds to the receptor
 - Indirect method
 - » Two competing reaction
 - » 1. analyte binds to receptor
 - » 2. "analog" binds to receptor which emits photons after excitations




Transduction Principles

- Thermal
 - Measuring the enthalpy of the detected reaction
 - Transducer
 - » Thermistor
 - » Thermocouples
 - » Change in temperatures down to 0.0001 C can be detected

- Mass
 - Analyte molecules are adsorbed on mechanical resonator. The change in mass result in change of resonance frequency (right picture)

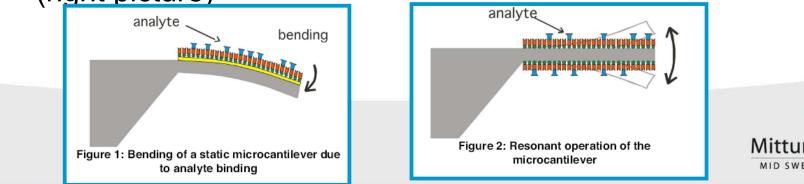

Transduction Principles, SAW

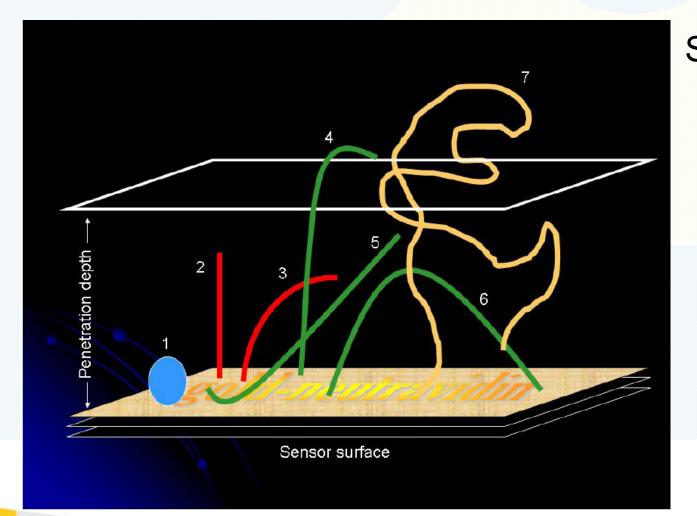

Shape of adsorbed bio-molecule have a large influence on change in surface velocity of an SAW transducer



Some examples

Bacterial luciferase (Lux): Luciferase is a generic name for an enzyme that catalyzes a light-emitting reaction. Luciferases can be found in bacteria, algae, fungi, jellyfish, insects, shrimp, and squid, and the resulting light that these organisms produce is termed bioluminescence. In bacteria, the genes responsible for the light-emitting reaction (the *lux* genes) have been isolated and used extensively in the construction of bioreporters that emit a blue-green light with a maximum intensity at 490 nm (Figure 2)². Three variants of *lux* are available, one that functions at < 30°C, another at < 37°C, and a third at < 45°C. The *lux* genetic system consists of five genes, *luxA*, *luxB*, *luxC*, *luxD*, and *luxE*. Depending on the combination of these genes used, several different types of bioluminescent bioreporters can be constructed.




Figure 2. Bioluminescence emitted from individual colonies of microbial cells containing the genes for bacterial luciferase.



Some examples


Enzyme

1.55

From a drop of blood




Glucose Monitoring Implantable



Glucose + O2 + H2O $\xrightarrow{*}$ Gluconic acid + H2O2 measurement routes:

- 1. pH change (acid production)
- 2. O2 consumption (fluorophore monitor)
- 3. H2O2 production (electrochemical)




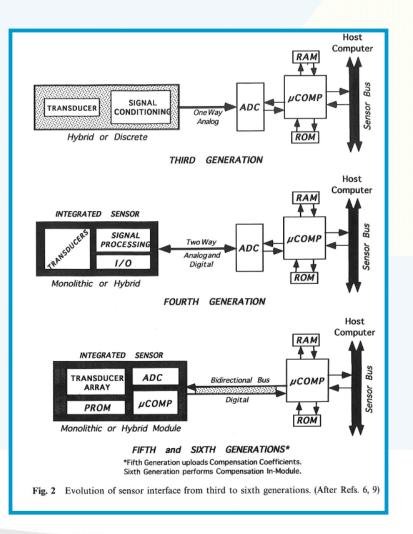

Solid State Sensor Evolution


- 1. Gen. No electronics in sensor
- 2. Gen. Amplification and temperature comp.
- 3. Gen. Amplification and buffering as discrete or hybride
- 4. Gen. Higher level of integration, some of the electronics integrated on the sensor chip
- 5. Gen. ADC is performed at the sensor.
- 6. Gen. Compensation is done in the integrated sensor



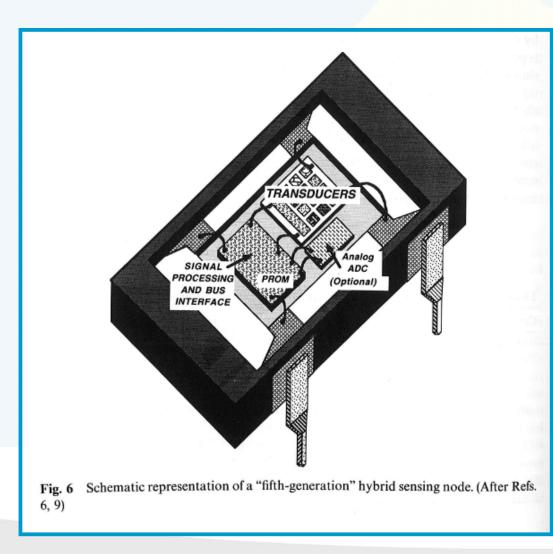


Hybride mounting of a sensor, using wire bondning



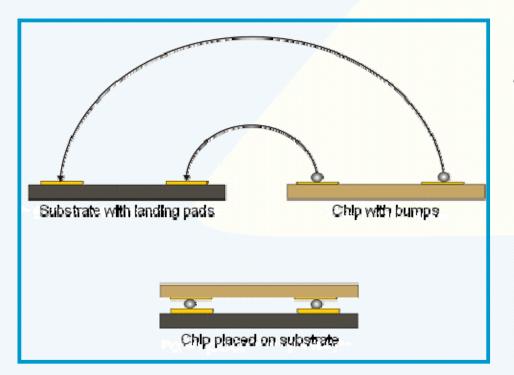

Flip chip bondning, sensor chip and electronic chip connected using metallic bumps



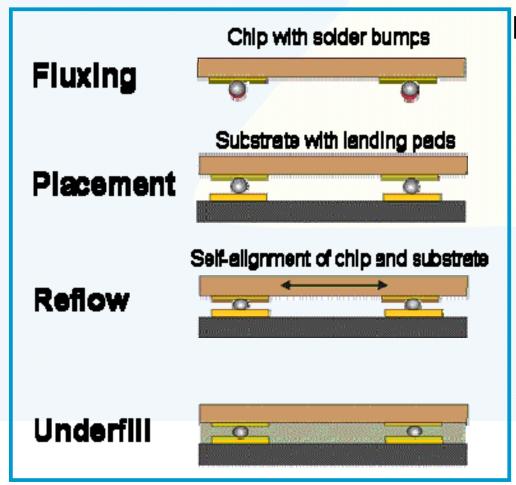

Flip chip boning procedure



Examination of sensor devices

- Lab report handed in latest 16 of January
 - Pass, not pass
- Home written exam
 - Two parts, basic part (E level, must be passed for higher grade), grading part (D to A), F not passed, Fx not passed redo parts of the basic part
 - Handed in latest 16 of January

